



# Actinic BL TL(-K) / TL-D(-K)

## Actinic BL TL 8W/10 1FM/10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General information		UV Depreciation at 2000 h	
Cap-Base	G5 [ G5]		35 %
Main Application	Insect traps	Operating and electrical	
Life to 50% Failures (Nom)	10000 h	Power (Nom)	7.1 W
Useful Life (Nom)	5000 h	Lamp Current (Nom)	0.145 A
		Voltage (Nom)	56 V
Light technical		Mechanical and housing	
Color Code	10	Bulb Shape	T16
Color Designation	Actinic	Approval and application	
Chromaticity Coordinate X (Nom)	222	Mercury (Hg) Content (Nom)	4.4 mg
Chromaticity Coordinate Y (Nom)	210		
UV Depreciation at 500 h	17 %		
UV Depreciation at 1000 h	25 %		

## Actinic BL TL(-K) / TL-D(-K)

UV	
UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	1.60 W
Product data	
Full product code	871150026042027
Order product name	Actinic BL TL 8W/10 1FM/10X25CC
EAN/UPC - Product	8711500260420

Order code	928001001030
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	250
Material Nr. (12NC)	928001001030
Net Weight (Piece)	25.300 g


### Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 8W/10 1FM/10X25CC	16 mm	288.3 mm	295.4 mm	293 mm	302.5 mm

Actinic BL TL 8W/10 1FM/10X25CC

### Photometric data

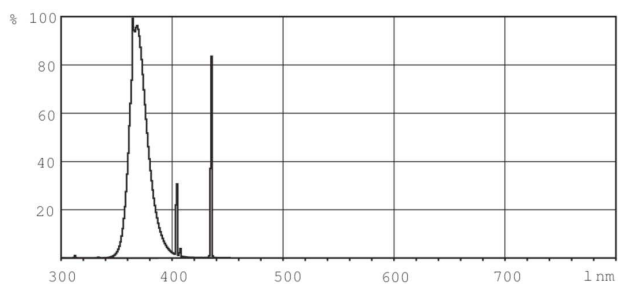

XDPB\_XUVATL\_10-Spectral power distribution B/W

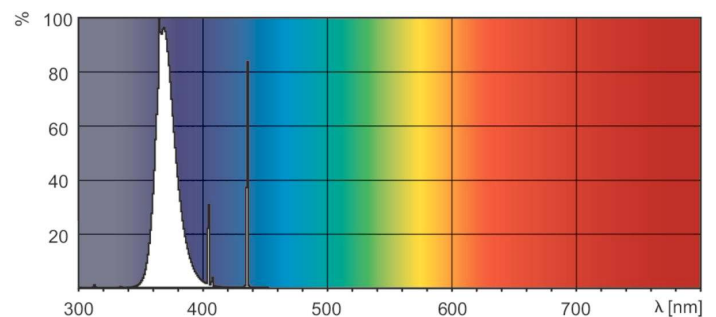

XDPO\_XUVATL\_10-Spectral power distribution Colour

