



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL 6W/10 1FM/10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		UV Depreciation at 2000 h		35 %
Cap-Base	G5 [G5]	UV Depreciation at 5000 h		50 %
Main Application	Insect traps	UV Depreciation at 8000 h		60 %
Life to 50% Failures (Nom)	10000 h	Operating and electrical		
Useful Life (Nom)	5000 h	Power (Nom)	6 W	
Light technical		Lamp Current (Nom)	0.16 A	
Color Code	10	Voltage (Nom)	42 V	
Color Designation	Actinic	Mechanical and housing		
Chromaticity Coordinate X (Nom)	222	Bulb Shape	T16	
Chromaticity Coordinate Y (Nom)	210			
UV Depreciation at 500 h	17 %			
UV Depreciation at 1000 h	25 %			

Actinic BL TL(-K) / TL-D(-K)

Approval and application	
Mercury (Hg) Content (Nom)	4.4 mg
UV	
UV-B/UV-A (IEC)	0.2 %
UV-A Radiation 100Hr (IEC)	1.4 W
Product data	
Full product code	871150026039027

Order product name	Actinic BL TL 6W/10 1FM/10X25CC
EAN/UPC - Product	8711500260390
Order code	928000501030
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	250
Material Nr. (12NC)	928000501030
Net Weight (Piece)	21.000 g


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 6W/10 1FM/10X25CC	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

Actinic BL TL 6W/10 1FM/10X25CC

Photometric data

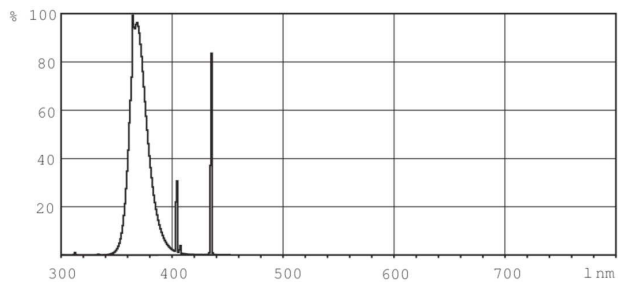

XDPB_XUVATL_10-Spectral power distribution B/W

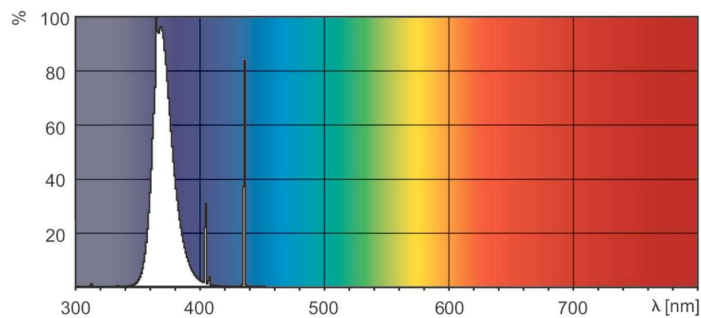

XDPO_XUVATL_10-Spectral power distribution Colour

