



# TUV T8

## TUV30W G30T8 25PK

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data

| General information             |                                  |
|---------------------------------|----------------------------------|
| Base                            | G13 [ Medium Bi-Pin Fluorescent] |
| Main Application                | Disinfection                     |
| Useful Life (Nom)               | 9000 h                           |
| System Description              | na [-]                           |
| Light technical                 |                                  |
| Color Code                      | TUV                              |
| Color Designation               | - [ Not Specified]               |
| Depreciation at Useful Lifetime | 12 %                             |

| Operating and electrical |          |
|--------------------------|----------|
| Power (Rated) (Nom)      | 30 W     |
| Lamp Current (Nom)       | 0.365 A  |
| Voltage (Nom)            | 102 V    |
| Mechanical and housing   |          |
| Cap-Base Information     | 2P       |
| Bulb Shape               | T8 [ T8] |

# TUV T8

## Approval and application

Mercury (Hg) Content (Nom) 2.0 mg

## UV

UV-C Radiation at 100 hr 11.5 W

## Product data

Order product name TUV 30W 1SL/25-Latest

EAN/UPC - Product 8711500726209

Order code 360164


Numerator - Quantity Per Pack 1

Local code description DESINFECTATION FLUORESCENT LAMPS


Numerator - Packs per outer box 25

Material Nr. (12NC) 928039504005

Net Weight (Piece) 0.297 lb




## Dimensional drawing

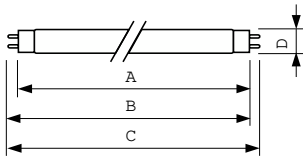


| Product               | D (max)  | A (max)   | B (max)   | B (min)    | C (max)     |
|-----------------------|----------|-----------|-----------|------------|-------------|
| TUV 30W 1SL/25-Latest | 1-1/8 in | 35-1/4 in | 35-1/2 in | 35-7/16 in | 35-13/16 in |

TUV 30W 1SL/25-Latest

## Photometric data

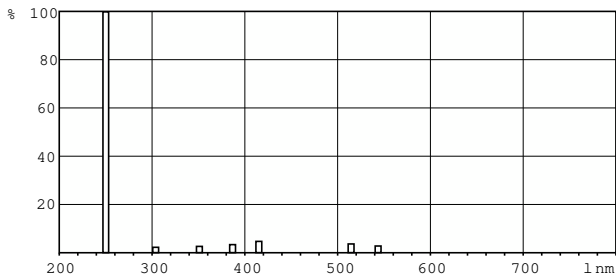

XDPB\_XUTUVTLD-Spectral power distribution B/W

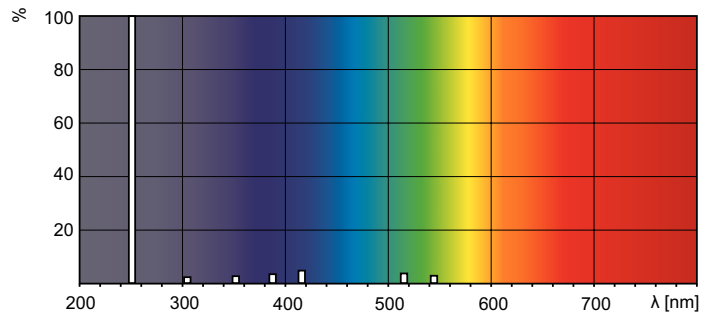

XDPB\_XUTUVTLD-Spectral power distribution Colour

